



# Portable Cut-off LW1400 / LW1401 355mm (14")

## Powerful Motor 2,200w

Photo : LW1400

Toolless replacement of  
abrasive cut-off wheel  
(LW1400only)

Large spark guard





# High power Portable Cut-off



## Toolless adjustment of guide plate (LW1400 only)

allows for easy adjustment of the guide plate by simple handling

- 3 stage position change
- 0 to 45 degree angle adjustment



## Change of saw head locking device from chain lock to pin lock (LW1400 only)

makes it easier to lock down the saw head for storage and transport.



## Carry handle

for easy transport to job site



Shaft lock for easy replacement of abrasive cut-off wheel

Quick release vise

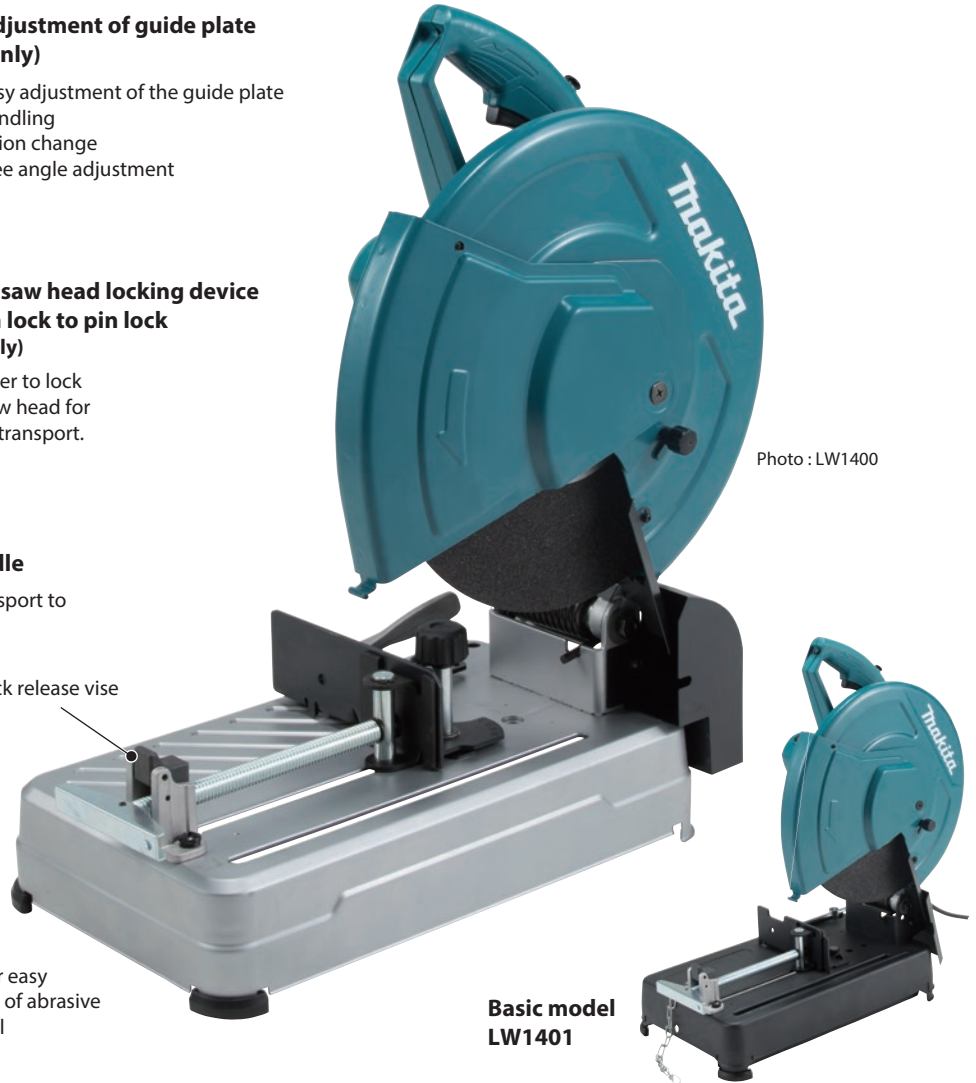






Photo : LW1400

Basic model LW1401

## Cutting Capacity

| Form of materials   | Miter angle   |  |
|---|---|--|
|   | 0°  | 45°  |
|  | D:<br>ø127mm<br>(2")  | D:<br>ø127mm<br>(2")                                 |
|  | H x W:<br>102 x 194mm<br>(4" x 7-5/8")<br>70 x 233mm<br>(2-3/4" x 9-1/8") | H x W:<br>115 x 103mm<br>(4-1/2" x 4-1/16")          |
|  | H x W:<br>119 x 119mm<br>(4-11/16" x 4-11/16")                            | H x W:<br>106 x 106mm<br>(4-3/16" x 4-3/16")         |
|  | S x S:<br>137 x 137mm,<br>T: 10mm<br>(5-3/8" x 5-3/8",<br>3/8")           | S x S:<br>100 x 100mm,<br>T: 10mm<br>(4" x 4", 3/8") |

D: Diameter W: Width H: Height S: Side T: Thickness

## Accessory

### Abrasive cut-off wheel

For all ferrous materials (Steel, cast iron) and other hard metals. These items are available on request. Contact us for the minimum order quantity.

Size (mm): 355x3x25.4  
Grit: A36P  
G.F.Q'ty: 1.0G


| Per pkg. | Part No.   |
|----------|------------|
| 5        | A-89545-5  |
| 25       | A-89545-25 |
| 5        | A-89953-5  |
| 5        | B-10730-5  |
| 25       | B-10730-25 |
| 5        | B-10665-5  |
| 25       | B-10665-25 |

### Double Reinforced Abrasive cut-off wheel

Size (mm): 355x3x25.4  
Grit: A30P  
G.F.Q'ty: 2.0G

| Per pkg. | Part No.   |
|----------|------------|
| 5        | B-16891-5  |
| 25       | B-16891-25 |



| Portable Cut-off  | LW1400 / LW1401                            | 355mm (14")                                | 203 |
|---|--|--|-----|
|  Double Insulation |  |  |     |
| <b>Standard Equipment:</b>  |  |  |     |
| Abrasive Cut-Off Wheel, Socket Wrench (LW1401 only)   |  |  |     |
|   | LW1400                                     | LW1401                                     |     |
| <b>Continuous rating Input</b>  | 2,200W                                     | 2,200W                                     |     |
| <b>Wheel diameter</b>   | 355mm (14")                                | 355mm (14")                                |     |
| <b>Hole dia.</b>  | 25.4mm (1")                                | 25.4mm (1")                                |     |
| <b>No load speed (rpm)</b>  | 3,800                                      | 3,800                                      |     |
| <b>Dimensions (L x W x H)</b>   | 530x295x640mm<br>(20-7/8"x11-5/8"x25-1/4") | 500x290x620mm<br>(19-3/4"x11-3/8"x24-3/8") |     |
| <b>Net Weight*</b>  | 17.0kg (37.5lbs)                           | 16.6kg (36.6lbs)                           |     |
| <b>Power supply cord</b>  | 2.5m (8.2ft)                               | 2.5m (8.2ft)                               |     |

\*Weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201511